

orto alresa

Centrifuges and laboratory products

info@ortoalresa.com

www.ortoalresa.com

+34 91 884 40 16



Special applications: Centrifuges life sciences


CYTOCENTRIFUGE

CYTOCENTRIFUGE

LCD



Centrifuges life sciences: Cytocentrifuge

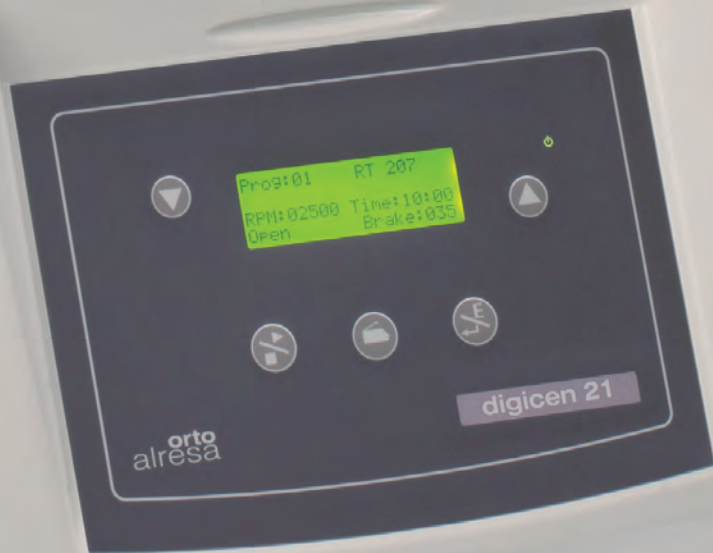

IVD CE

Max. capacity: 4 x 2,2 ml.

Max. speed: 839 xg / 2.500 RPM

The cytocentrifuge Ortoalresa is designed for concentration of biological samples on a visible surface for the microscope and its subsequent identification and characterisation.

Easy to handle, reduces the handling time, indispensable features in oncology, cytology and microbiology services. It has a swing out rotor for 4 supports, with two positions for recovery of the filtrate for a second processing in the case of low concentration samples. It can adapt rotors for tubes or plates of the Digicen 21 centrifuge.

Features

- Sealed holders which prevent the leak of the sample, easy to use.
- Fast identification of microorganism.
- Allows cells detection even in low concentrated liquids.
- Processing time <15 min.
- Alarm to prevent the drying of the samples every 20 seconds.
- Available rotors for tubes (check Digicen 21 accessories, pag. 40)

LCD screen:

- Shows RPM and RCF, time and acceleration/deceleration (PCBS).
- Speed programming in 50 RPM/ 50 xg steps.
- Timer countdown/up from "0" or at "set RPM/ RCF" for reproducible tests.
- Timer from 1 to 99 min. programmable in 5 sec. steps and hold position.
- PCBS: Progressive controlled acceleration and braking system up to 175 selectable ramps that prevents sample homogenization after separation.
- 16 programmable memories.
- Several acoustic and visual messages warning the user the device situation.

Easy to use

- Microprocessor controlled.
- Induction motor maintenance free (brushless).
- Rotors list on memory.
- Noise level: below 60 dB.
- Start, stop, open lid and short spin with adjustable speed buttons.
- Option of free/locked adjustment of RPM/ RCF along the run.
- Automatic open lid, programable.
- Last values remain in memory.
- Automatic rotor recognition. Over-speed protection.

Safety

- Lid provided with security systems:
 - Automatic lid lock system, motorized with double lock.
 - Emergency lid-lock release.
 - Locking and protection against opening along the run.
 - Lid dropping protection.
 - Port in the lid for calibration and operation checking.
- Unbalance detection and switch off.
- Protection safety ring between the centrifugation chamber and the housing.
- Chamber of centrifugation in stainless steel (easy cleaning).
- Rotors and adapters autoclavable, easy to install by the user.
- Forced ventilation to reduce temperature increasing.
- Automatic disconnection for energy saving up to 8 h., with deactivation option.

EU Directives: 2011/65/EU, 2012/19/EU, 2014/30/EU, 2014/35/EU, 98/79/EC.

Standards: EN 61010-1, EN 61010-2-020, EN 61326-2-6, EN 61326-1.

Versions	Dimensions (mm)(w x d x h)			Net weight (Kg)	Voltage (V)	Frecuency (Hz)	Consumption (W)
CE 110	410	530	320	36	220-230	50-60	440
CE 116	410	530	320	36	110-120	50-60	420

Accessories

RT 207



ROTOR	SWING OUT
Max. capacity	4x2.2 ml
RPM Max.	2.500
Radius (mm)	120
RCF Max. (xg)	839
Cytocontainers	4

Surface on slide: 6,2 mm or 8,7 mm diameter

orto
alresa
About centrifugation

info@ortoalresa.com

www.ortoalresa.com

+34 91 884 40 16

Álvarez Redondo S.A.
C/ Misericordia, 23.
Fax: +34 91 884 44 23
28864 AJALVIR Madrid (Spain)
Edition: January 2017.
Subject to modifications

